

A large, stylized magnifying glass graphic. The handle is a thick blue line extending from the bottom left towards the center. The lens is a large yellow circle with a white border, set against a blue circular background. Inside the yellow circle, the text "DATA SHEET" and "ES-2835-109V-XX-XXX-XX" is written in blue.

DATA SHEET

ES-2835-109V-XX-XXX-XX

CONTENTS

1. Introduction and features
2. Applications
3. Package dimensions
4. Absolute maximum ratings
7. Characteristic and curves
8. Reflow solder characteristics
9. Packaging specification
10. Cautions



ES-2835-109V-XX-XXX-XX Datasheet

This 2835 LED Light Source is a high performance energy efficient device which can handle high thermal and high driving current. The small package outline and high intensity make it an ideal choice for LED panel light, LED bulb light, LED tube light, backlighting and etc.

The White Power LED is available in the range of color temperature from 2700K to 7000K. This part has a foot print that is compatible to most of the same size LED in the market today.




FEATURES

- Available in Cool White, Neutral White and Warm White color
- ANSI-compatible chromaticity bins
- High luminous Intensity and high efficiency
- Compatible with reflow soldering process
- Low thermal resistance
- Long operation life
- Wide viewing angle at 120°
- Silicone encapsulation
- Environmental friendly, RoHS Compliance


APPLICATIONS

- Flat panel light
- Backlighting
- LED tube light
- LED bulb light
- Decorative and landscape lighting
- Signage and channel letter
- Reading lamp
- Decorating and entertainment lighting
- Architectural lighting

PACKAGE DIMENSIONS

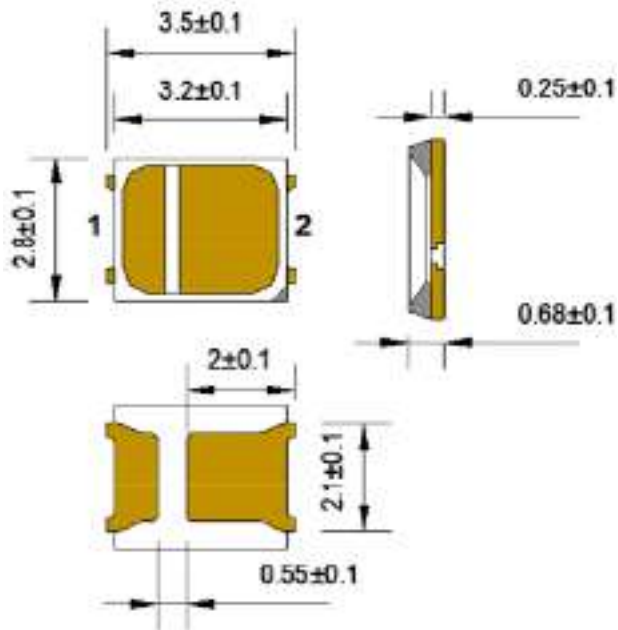

Recommended Solder Pad Design

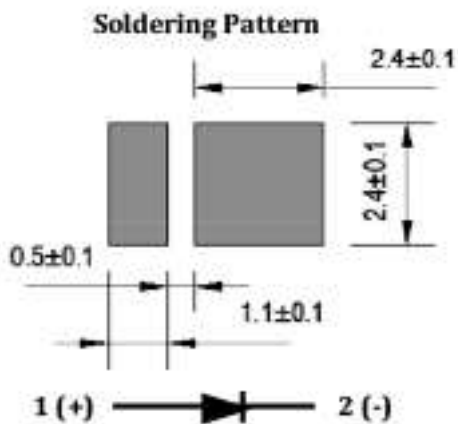

Notes:

1. All dimensions in millimeters.
2. Thickness tolerance of copper plate is ± 0.02 mm.
3. Thickness tolerance of product is ± 0.05 mm.
4. Tolerance is ± 0.1 mm unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Absolute Maximum Rating	Unit
Forward current	I_F	120	mA
Peak Forward Current ^[1]	I_{FP}	200	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_d	1000	mW
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+100	°C
Soldering Temperature	T_{sld}	Reflow Soldering: 260°C for 10 seconds	
LED Junction Temperature	T_j	125	°C

Note:

I_{FP} Conditions: Pulse Width ≤ 10 msec. and Duty $\leq 1/10$.


CHARACTERISTICS (T_j=25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=100$ mA	8.4	--	9.6	V
Viewing Angle	$2\theta_{1/2}$	$I_F=100$ mA	--	120	--	deg.
Luminous Flux	Φ_v	$I_F=100$ mA	113	--	140	lm
Color Rendering Index	CRI	$I_F=100$ mA	80	--	--	--
Color Temperature	CCT	$I_F=100$ mA	2700	--	7000	K
Thermal Resistance (Junction to Solder point)	R_{th-js}	$I_F=100$ mA	--	20	--	°C/W


Notes:

1. Luminous flux is measured with an accuracy of $\pm 10\%$.
2. Chromaticity coordinate bins are measured with an accuracy of ± 0.01 .
3. CRI is measured with an accuracy of ± 2 .
4. Some color and CRI bins may have limited availability, please contact us before ordering.
5. All measurements were made under the standardized environment of Everstar


RELATIVE SPECTRAL POWER DISTRIBUTION ($T_j=25^{\circ}\text{C}$)

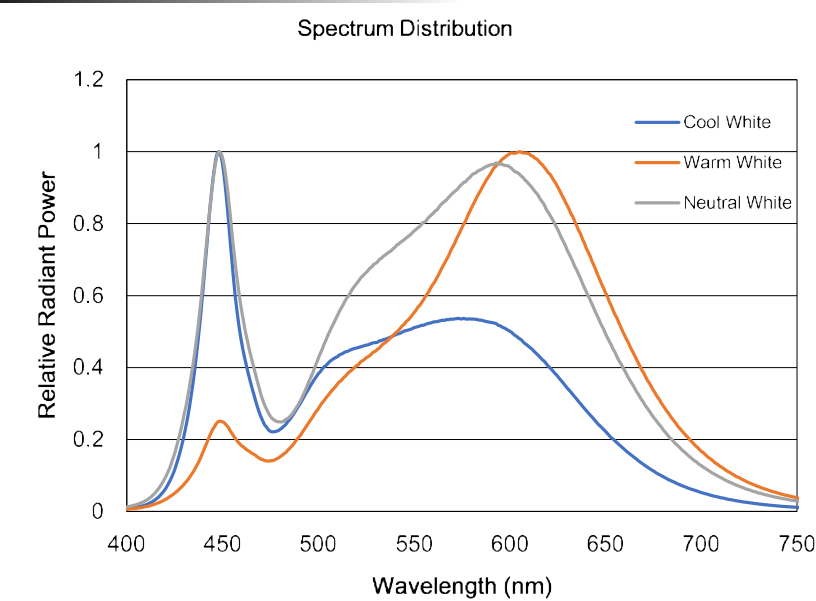

TYPICAL SPATIAL DISTRIBUTION

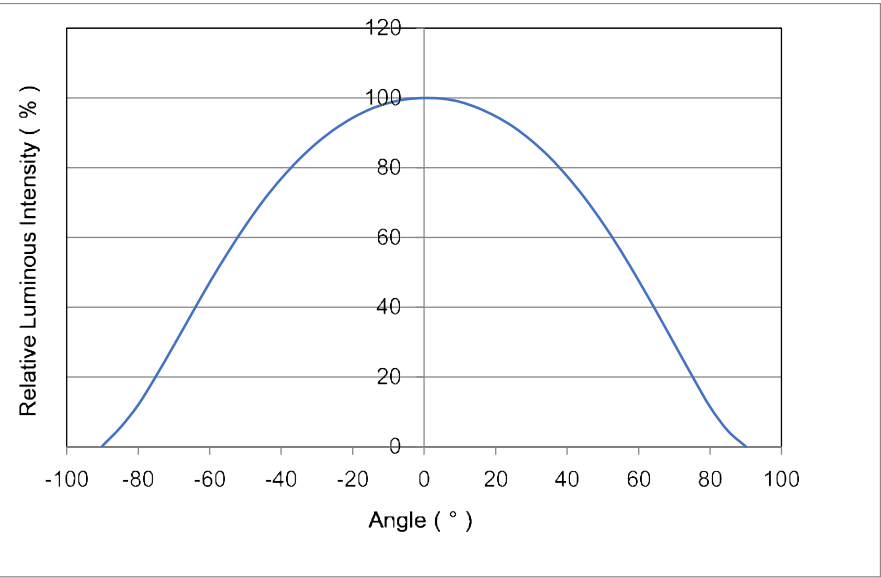


RELATIVE LUMINOUS FLUX VS.CURRENT (T_j=25°C)

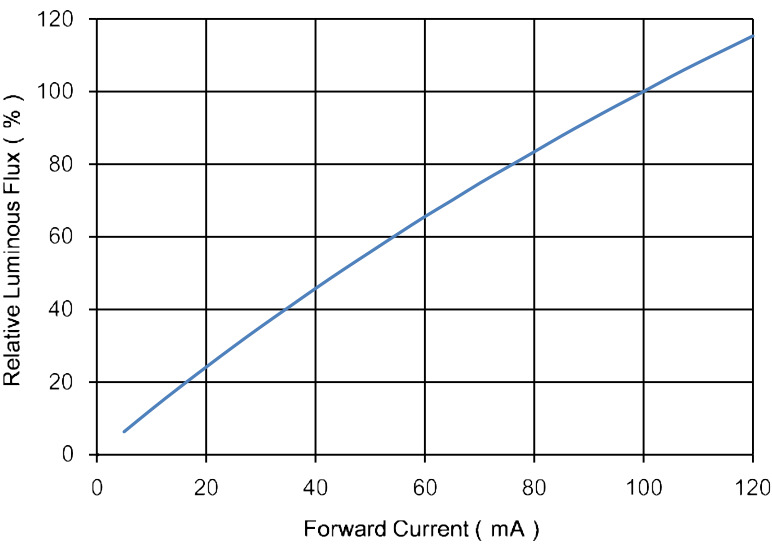


ELECTRICAL CHARACTERISTICS (T_j=25°C)


Forward Current vs. Forward Voltage

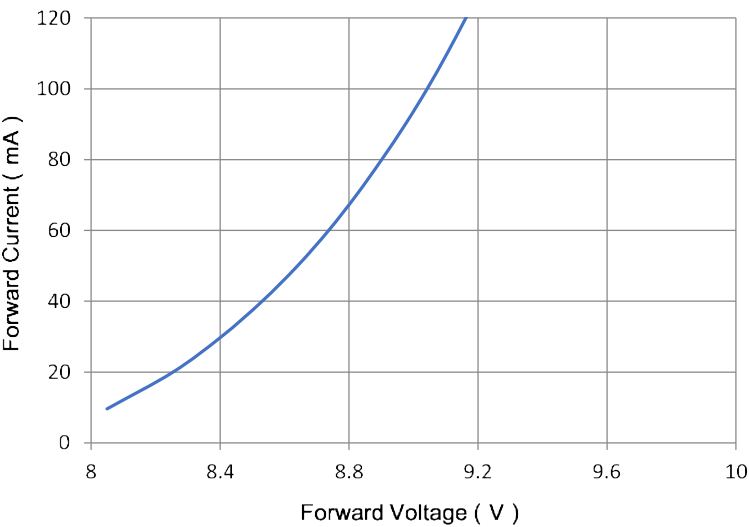

MAXIMUM CURRENT VS. AMBIENT TEMPERATURE

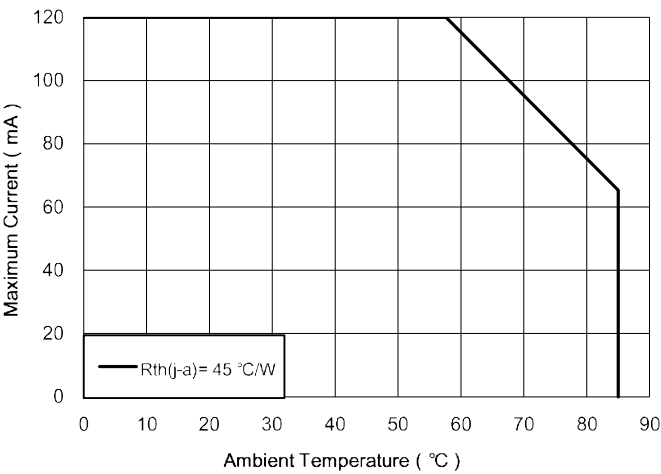

RELATIVE RADIANT FLUX VS. JUNCTION TEMPERATURE

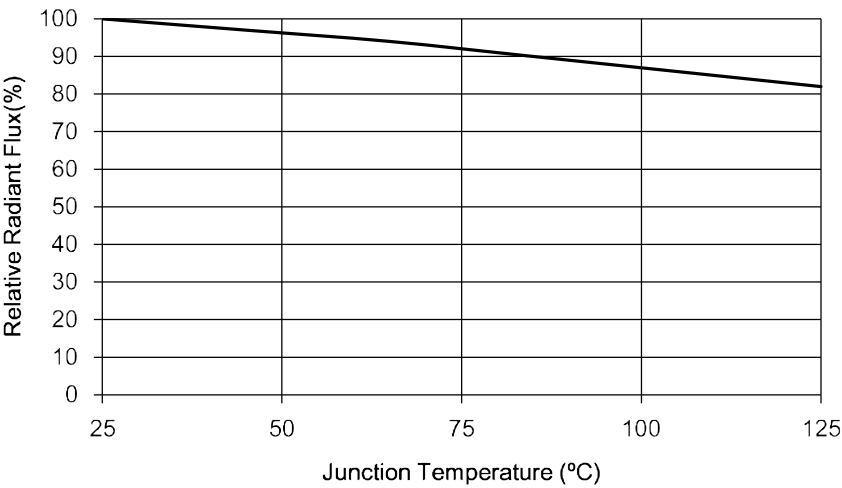

SORTING RANKS

(1) Luminous Flux (Tj=25°C)

Ordering code	Condition	Rank		Unit
		L1	L2	
ES-2835-109V--XX-827	100mA	115-120	120-125	lm
ES-2835-109V--XX-830		118-122	122-128	
ES-2835-109V--XX-840		128-135	135-140	
ES-2835-109V--XX-857		128-135	135-140	
ES-2835-109V--XX-865		128-135	135-140	

(2) Forward Voltage (Tj=25°C)


Rank	Condition	Min.	Max.	Unit
V1	100mA	8.8	9.1	V
V2	100mA	9.1	9.3	V

Notes:


1. 10% tolerance for luminous intensity may be caused by measurement inaccuracy.
2. Measurement Uncertainty of the Forward Voltage : $\pm 0.1V$

(3) Chromaticity Bins


Part Number	ES2835-109V-XX-827					
Bin Code	CCT	Color Coordinates (X,Y)				
27-5	2700K	X	0.4729	0.4521	0.4425	0.4627
		Y	0.4254	0.4204	0.3951	0.3998

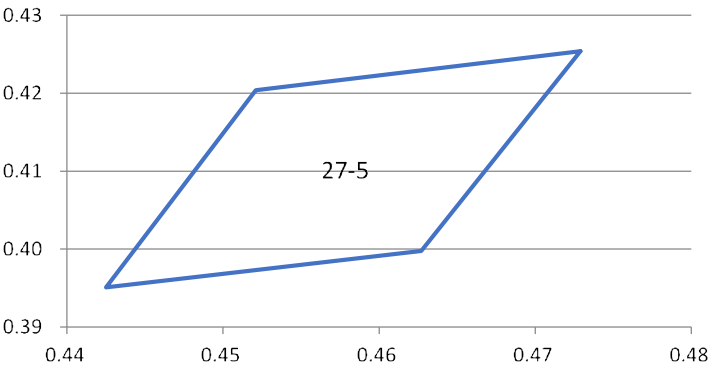


Part Number	ES2835-109V-XX-830					
Bin Code	CCT	Color Coordinates (X,Y)				
30-5	3000K	X	0.4504	0.4278	0.4196	0.4408
		Y	0.4198	0.4128	0.3873	0.3938

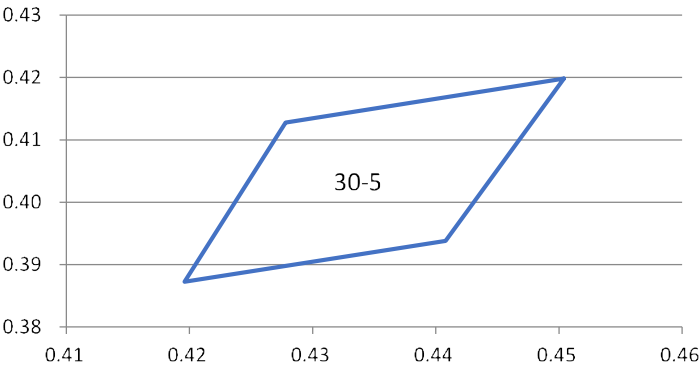


Part Number	ES-2835-109V-XX-840					
Bin Code	CCT	Color Coordinates (X,Y)				
40-5	4000K	X	0.3967	0.3726	0.3682	0.3905
		Y	0.4006	0.3855	0.3598	0.3733

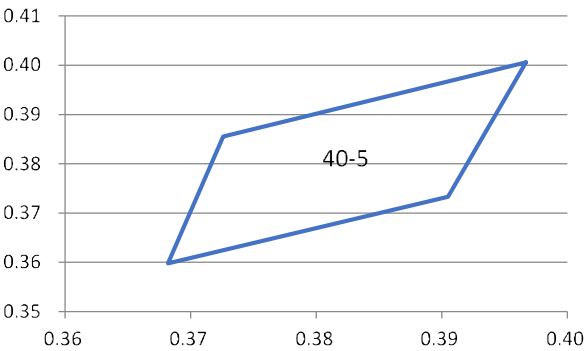

Part Number	ES-2835-109V-XX-860					
Bin Code	CCT	Color Coordinates (X,Y)				
60-5	6000K	X	0.3296	0.3137	0.3151	0.3287
		Y	0.3527	0.3384	0.3177	0.3296

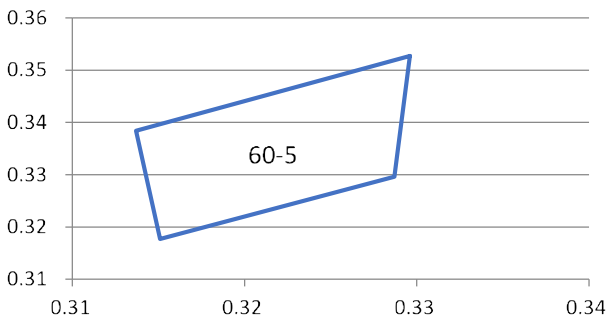


Part Number	ES-2835-109V-XX-860				CCT	6000K
Bin Code	CCT	Color Coordinates (X,Y)				
65-3	6325-6746K	X	0.3154	0.3086	0.3096	0.3161
		Y	0.3345	0.3277	0.3219	0.3284
65-A	6158-6535K	X	0.3179	0.3113	0.3123	0.3187
		Y	0.3420	0.3353	0.3280	0.3344
65-B	6535-6910K	X	0.3113	0.3054	0.3067	0.3123
		Y	0.3353	0.3295	0.3224	0.3280
65-C	6535-6910K	X	0.3123	0.3067	0.3080	0.3133
		Y	0.3280	0.3224	0.3153	0.3207
65-D	6158-6535K	X	0.3187	0.3123	0.3133	0.3193
		Y	0.3344	0.3280	0.3207	0.3267

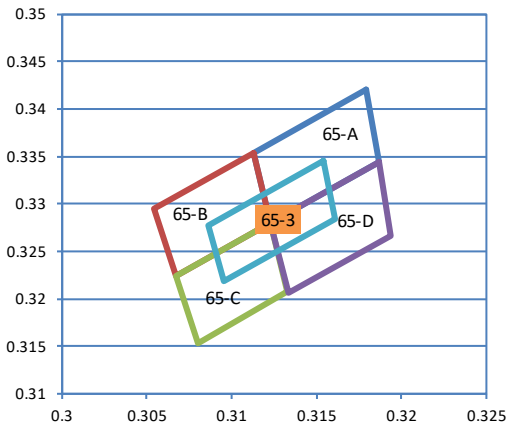



REFLOW SOLDERING CHARACTERISTICS

Preheating : 140°C~160°C±5°C,within 2 minutes.
Operation heating : 260°C(Max.) within 10 seconds.(Max)
Gradual Cooling (Avoid quenching).

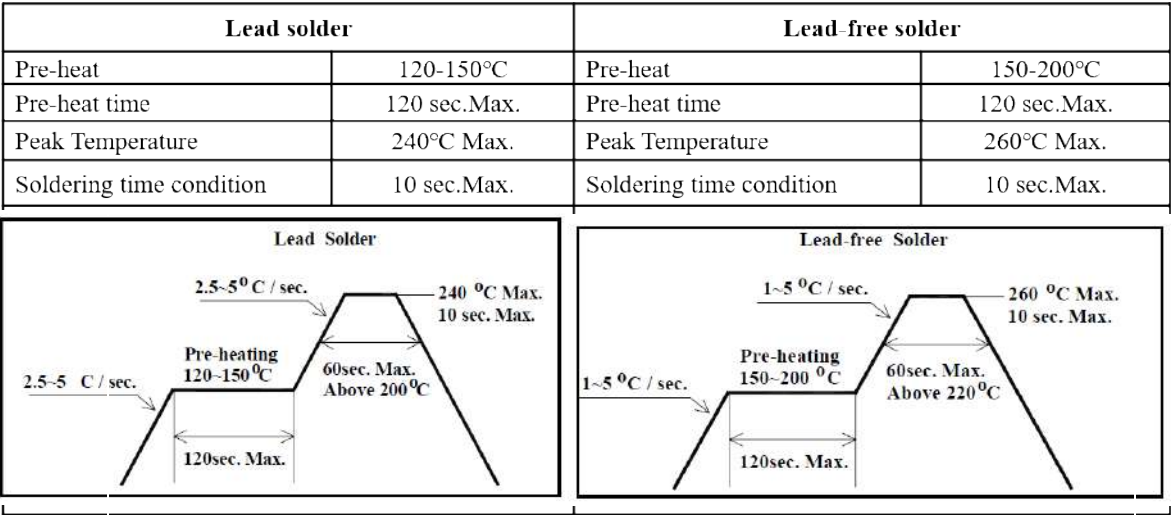

Notes:
The encapsulated material of the LEDs is silicone . Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the picking up nozzle, the pressure on the silicone resin should be proper.


TAPE AND REEL

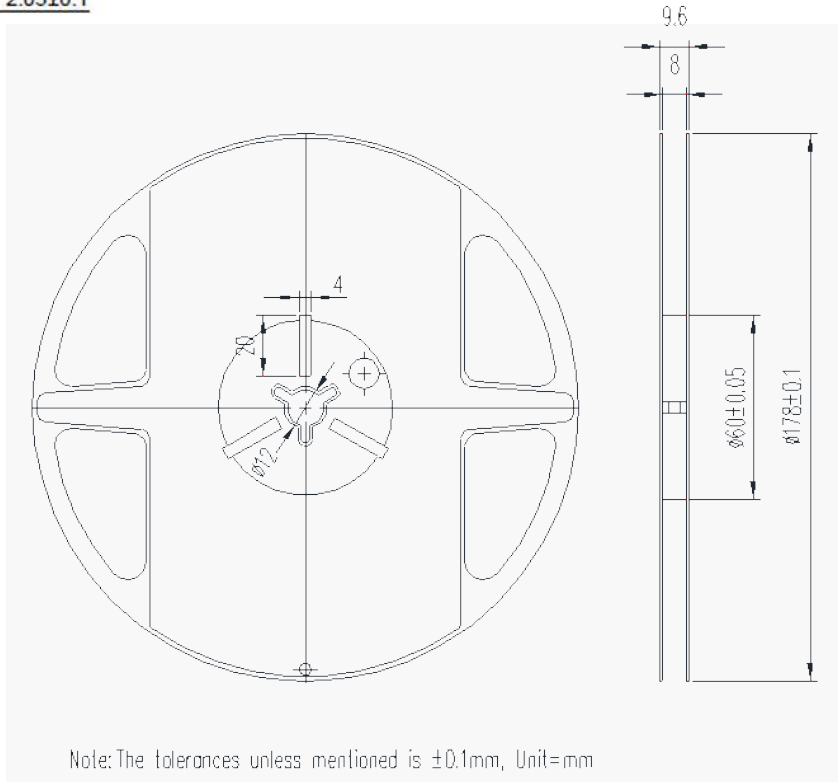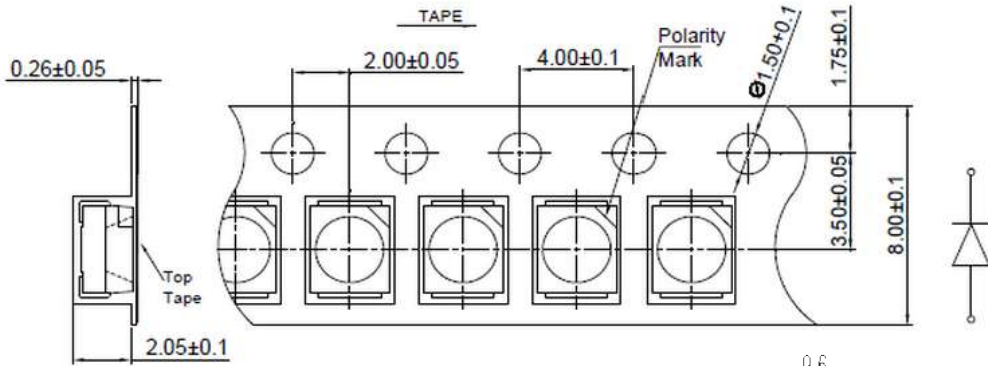

Notes:

- (1) Quantity : 4,000pcs/Reel
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches to be ±0.2mm
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape
- (4) Package : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package.

PACKAGING

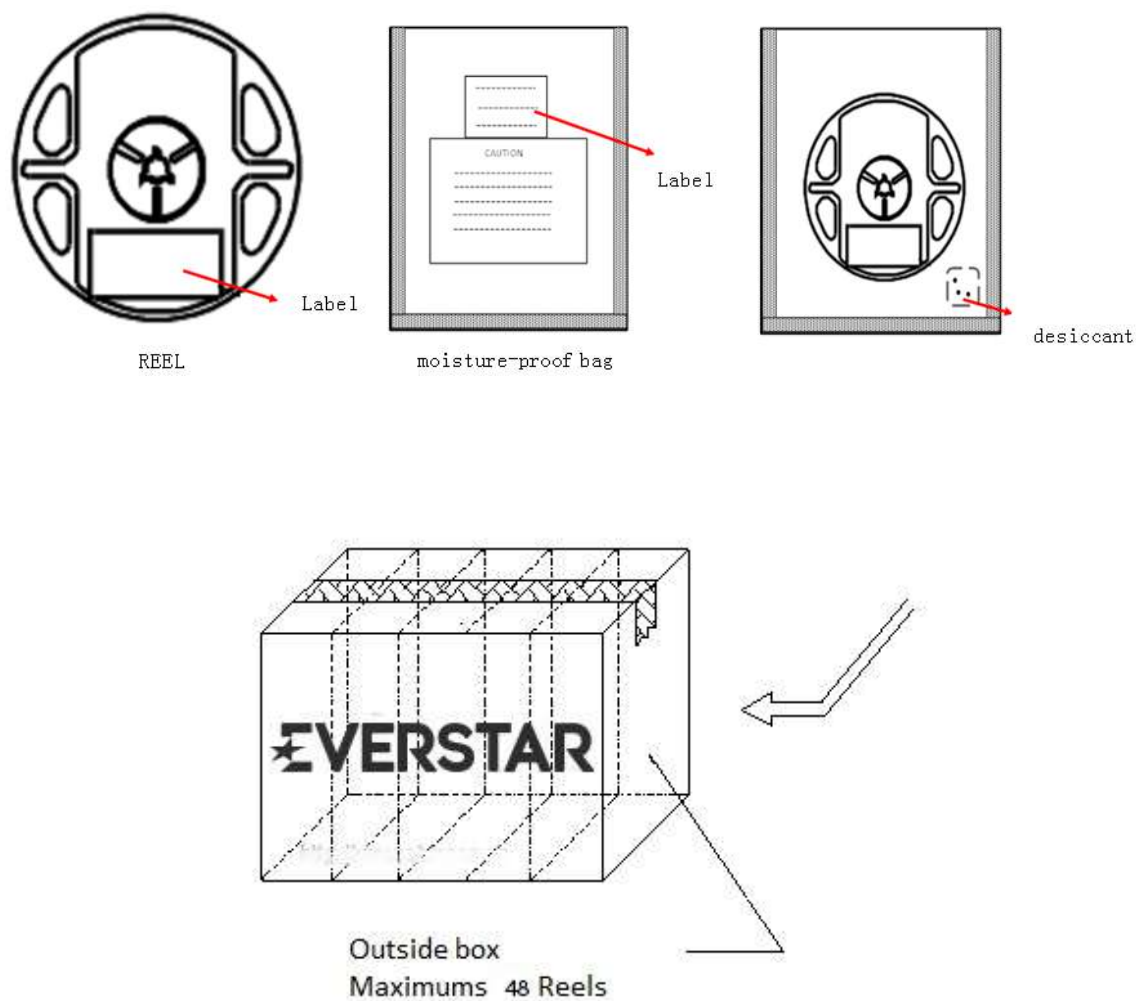

TAPE AND REEL

Test Items	Test Duration	Number of Damaged
Steady State Operating Life of High Temperature (HTOL) Ts=85°C, IF=Max	1000hrs	0/20
Steady State Operating Life of Low Temperature (LTOL) Ta=-40°C, IF=Max	1000hrs	0/20
Pulse Wet Operating Life of High Temperature (PWHTOL) 60°C/90%RH, IF30mins ON/30min OFF	500hrs	0/20
High Temperature Storage (HTS) 100°C	1000hrs	0/20
Low Temperature Storage (LTS) -40°C	1000hrs	0/20
Thermal Shock (TS) -45°C~125°C 30min dwell 20sec transfer	200cycles	0/20
Solder Resistance (SR) 265°C, 3X MSL	5sec	0/20
Solder Ability (SA) 245°C5sec, 95% coverage	5sec	0/11
Mechanical Shock (MS) 1500G 0.5msec pulse shock	Each6 axis	0/6
Random Vibration (RV) 6G RMS, 10-2000Hz, 10min	Per axis	0/6
Variable Vibration Frequency (VVF) 10-2000-10Hz, log or linear sweep rate, 20G for 1 min, 1.5mm each apply 3x per axis over	6hrs	0/6
Salt Spread (SS) 35°C, 30g/m2/day	48hrs	0/11

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward	Vf	IF=Typical Current		U.S.L x1.1
Luminous Flux	lm	IF=Typical Current	L.S.L x0.7	
CCX&CCY	x,y	IF=Typical Current		Shift<0.02

PRECAUTION FOR USE

- (1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA should be used.
- (2) When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.
- (3) LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3 months or more after being shipped from EVERSTAR, a sealed container with a nitrogen atmosphere should be used for storage.
- (4) The LEDs must be used within seven days after opening the moisture proof packing. Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- (5) The appearance and specifications of the product may be modified for improvement without notice.
- (6) This LED is sensitive to the static electricity and surge. It is recommended to use a wrist Band or antielectrostatic glove when handling the LEDs.
- (7) On manual soldering, a solder tip must be needed as grounded for usage. If over voltage which exceeds the absolute maximum rating is applied to LEDs, it will cause damage LEDs and result in destruction. Damaged LEDs will show some unusual characteristics such as leak current remarkably increase ,turn-on voltage becomes lower and the LEDs get unlighted at low current.